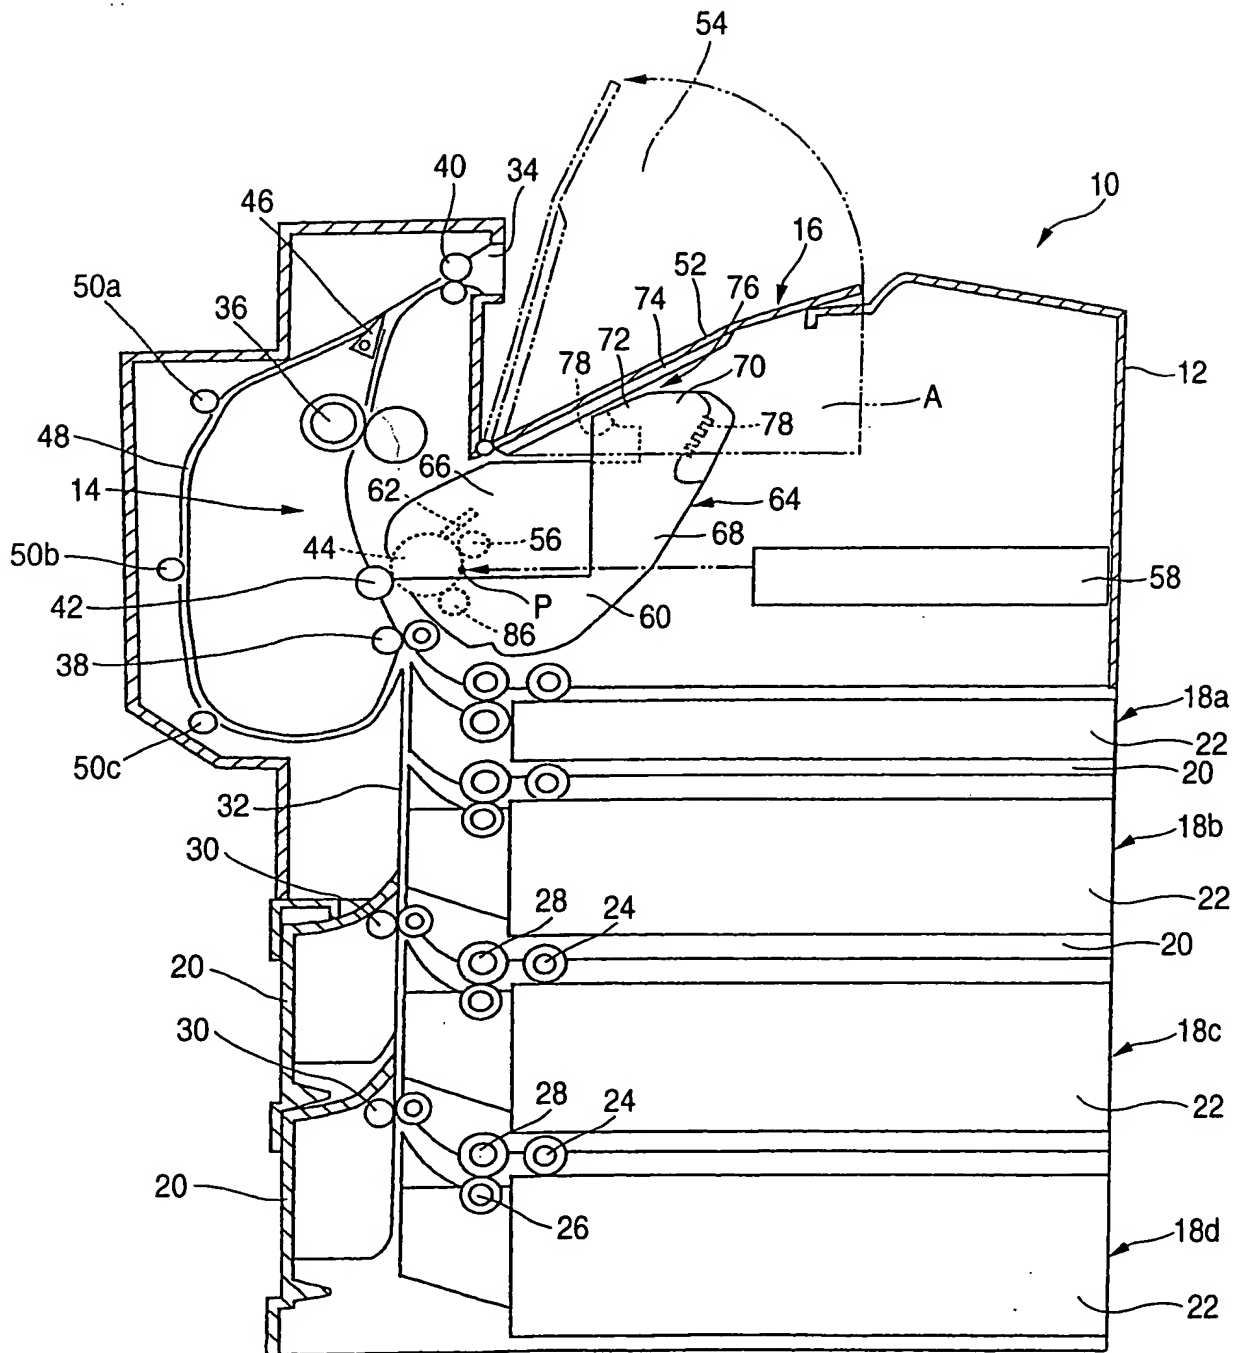


Fig. 1



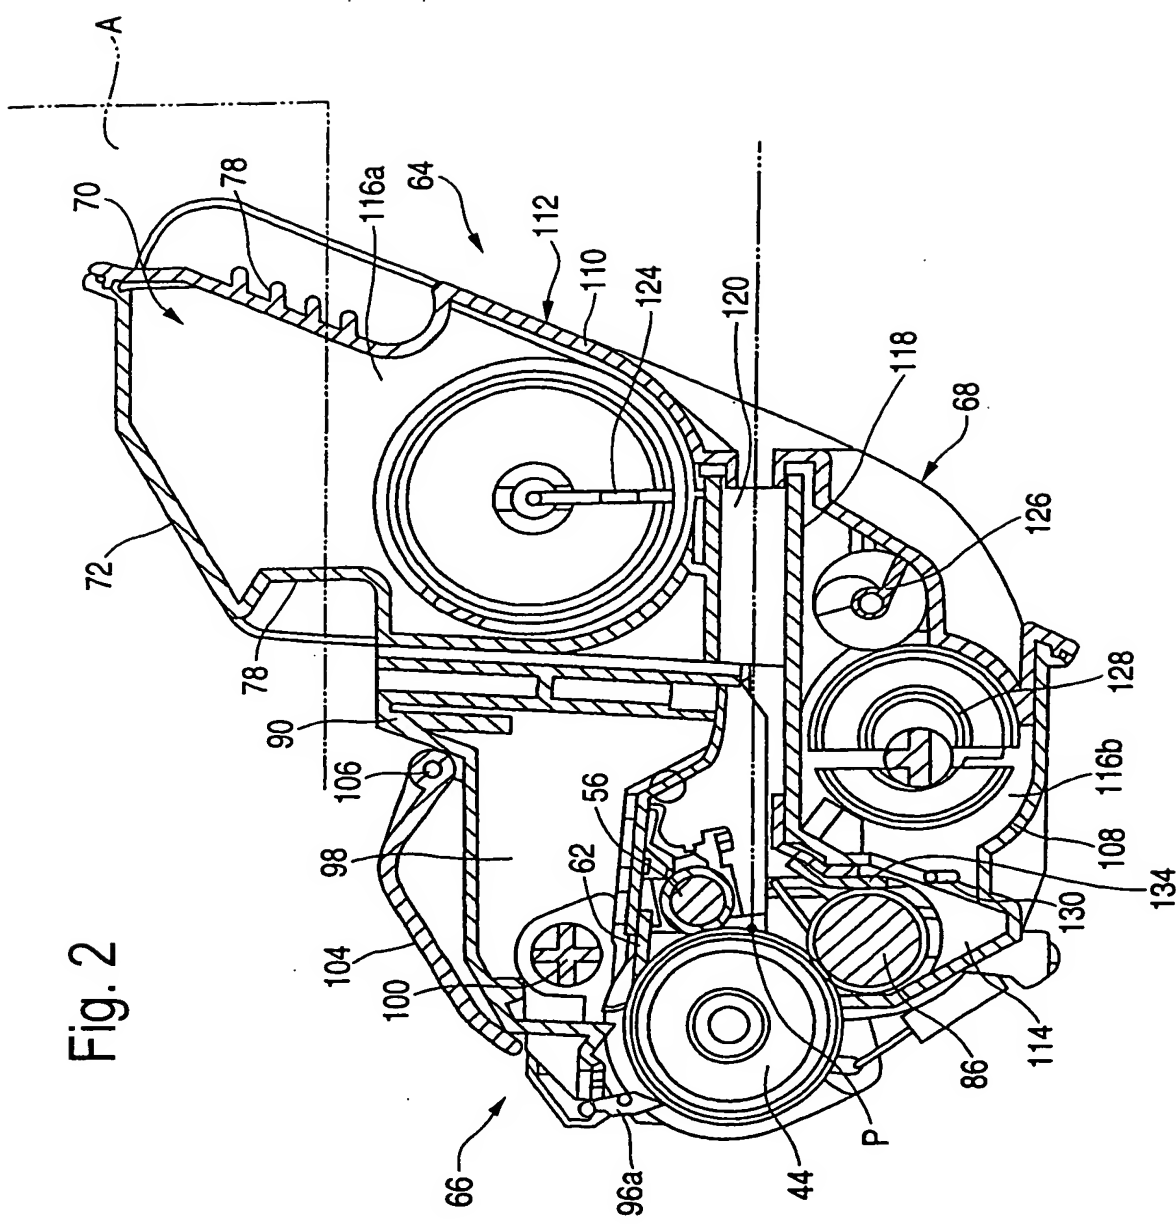


Fig. 3

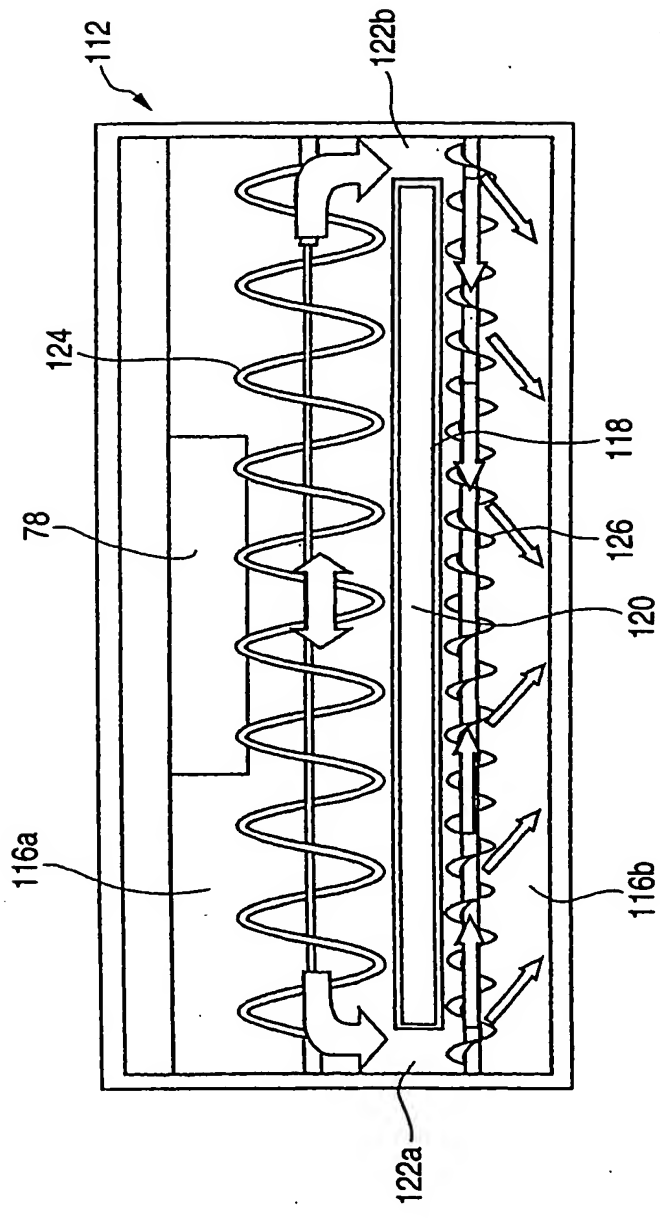


Fig. 4

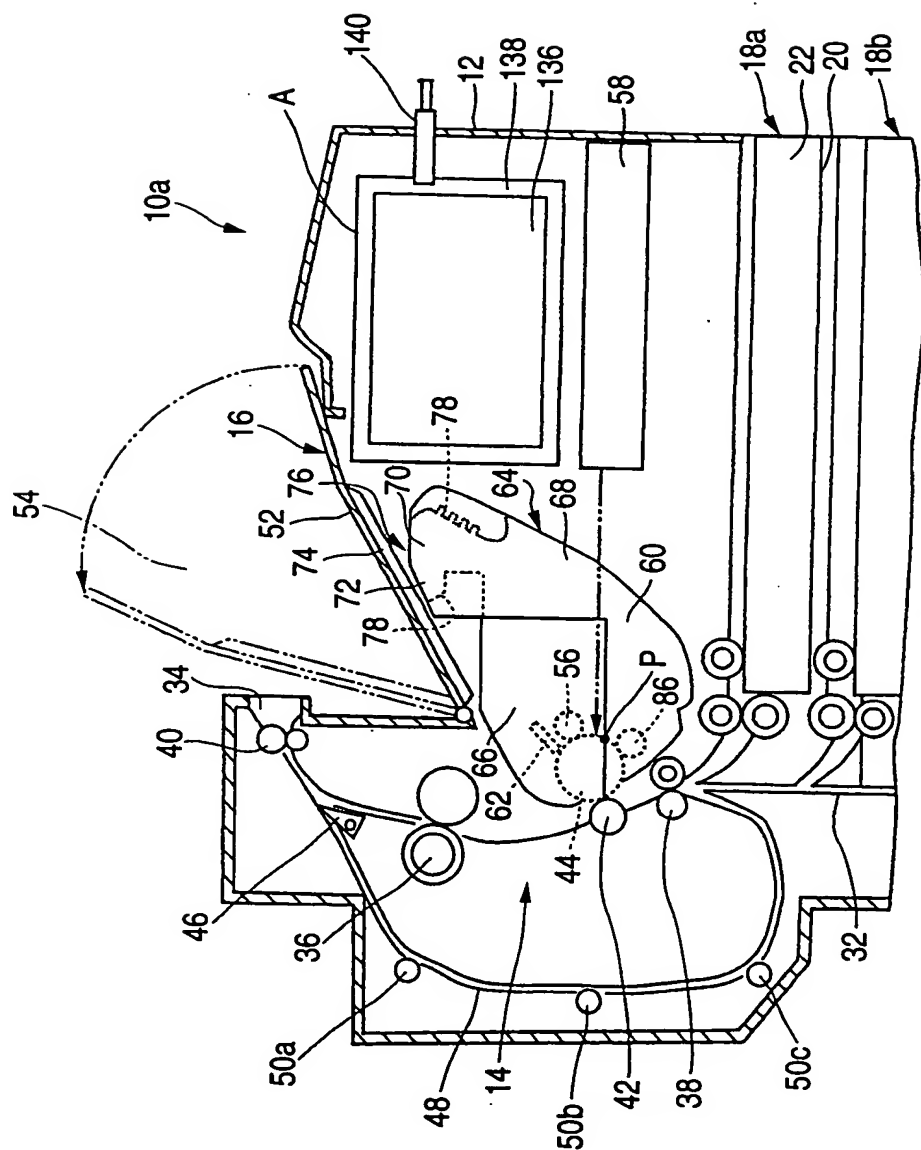


FIG. 10 is a cross-sectional view of a device assembly 10a. The assembly includes a housing 12 with an interior cavity 14. A component 16 is mounted within the cavity, featuring a series of parallel strips or fins 18a. A central rectangular block 20 is positioned below the strips. A curved, flexible member 22 is located at the bottom of the cavity. A series of circular elements, possibly screws or fasteners, are shown along the bottom edge of the housing, labeled 32, 34, 36, 38, 40, 42, 44, 46, 48, 50a, 50b, and 50c. A dashed line 52 indicates a path or boundary. A wavy line 54 is shown near the top left. A dashed line 56 points to a specific feature. A dashed line 58 indicates another path. A dashed line 60 points to a feature. A dashed line 62 points to a feature. A dashed line 64 points to a feature. A dashed line 66 points to a feature. A dashed line 68 points to a feature. A dashed line 70 points to a feature. A dashed line 72 points to a feature. A dashed line 74 points to a feature. A dashed line 76 points to a feature. A dashed line 78 points to a feature. A dashed line 86 points to a feature. A dashed line P points to a feature.

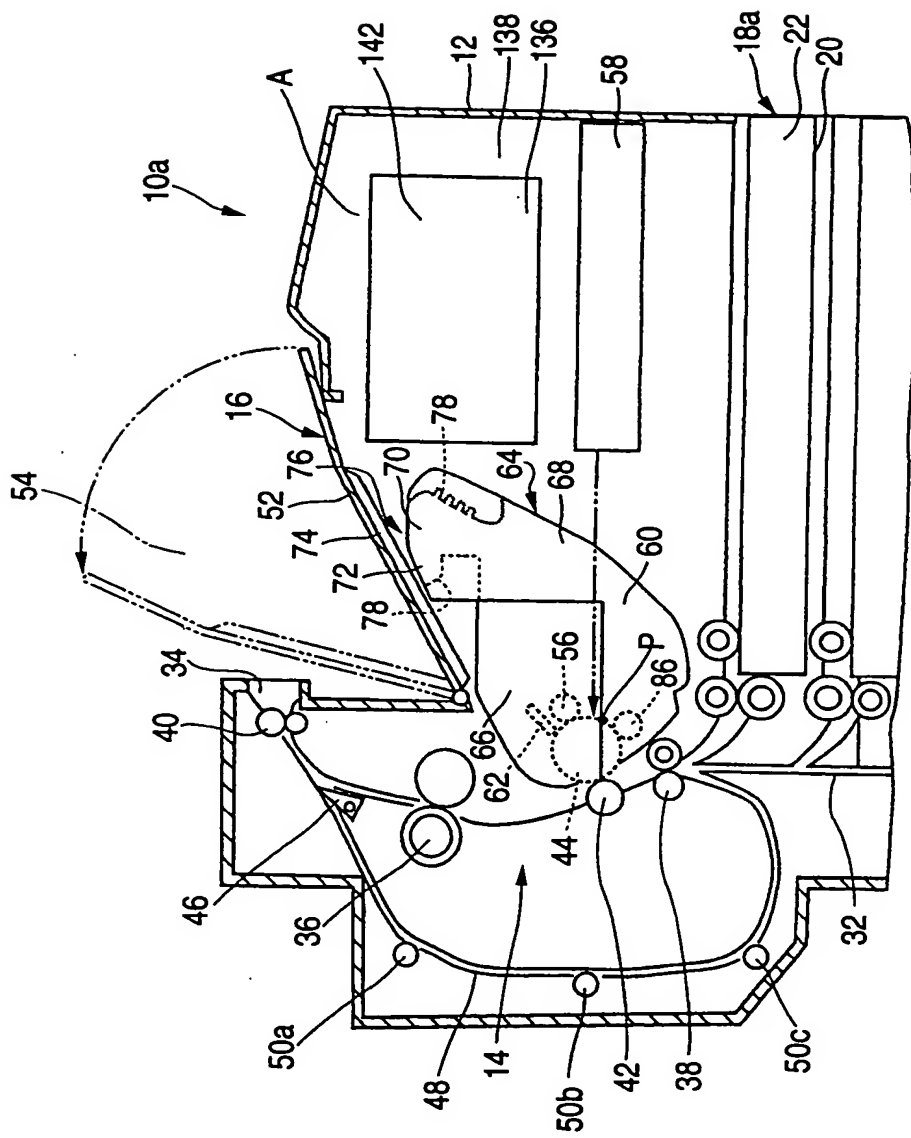


Fig. 6
RELATED ART

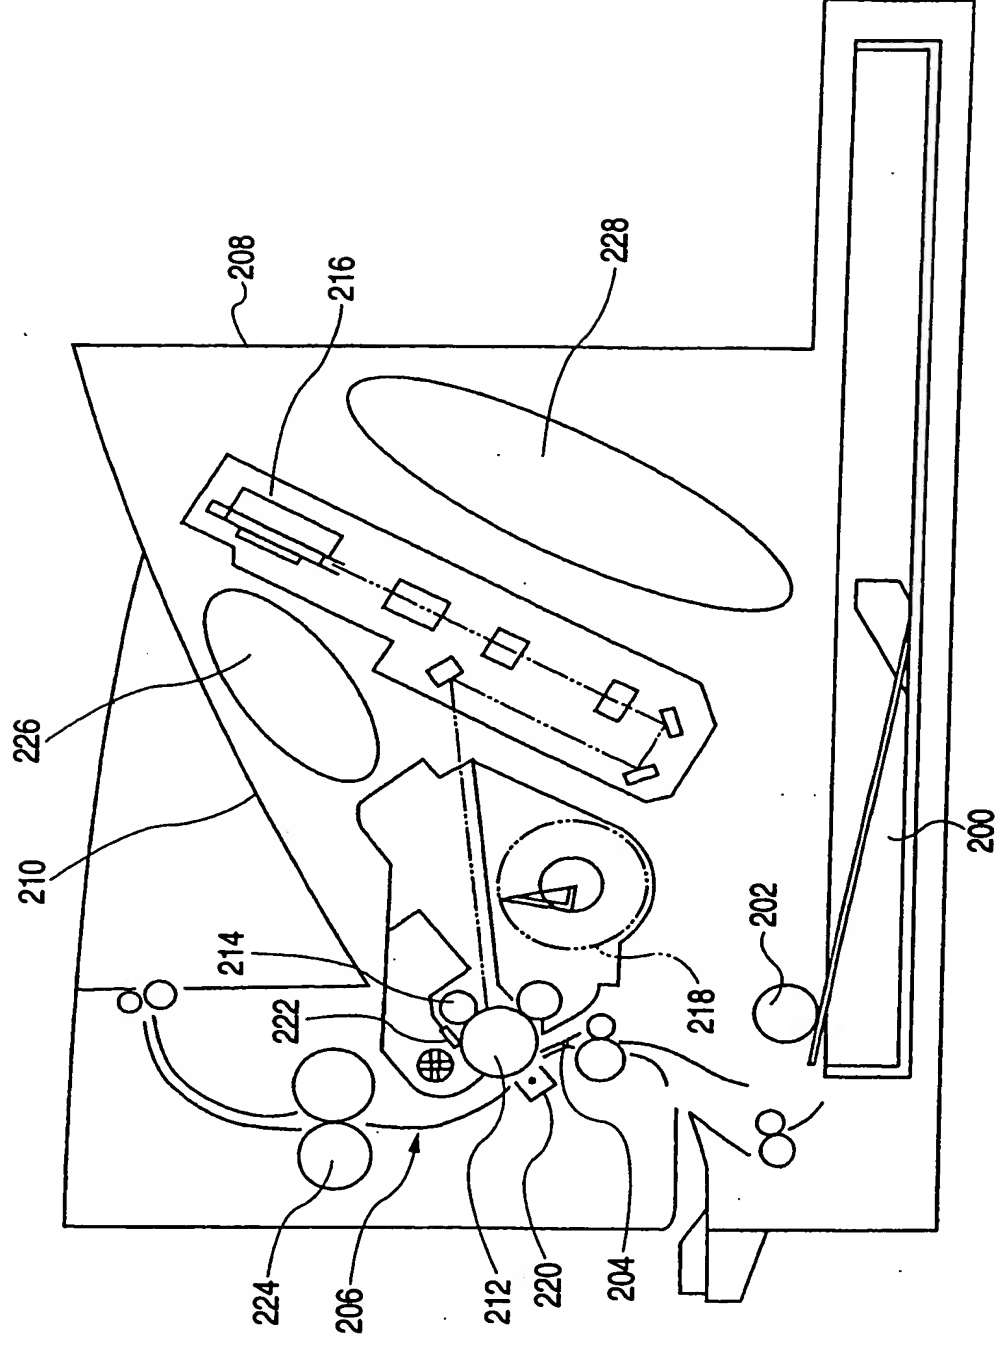


Fig. 7

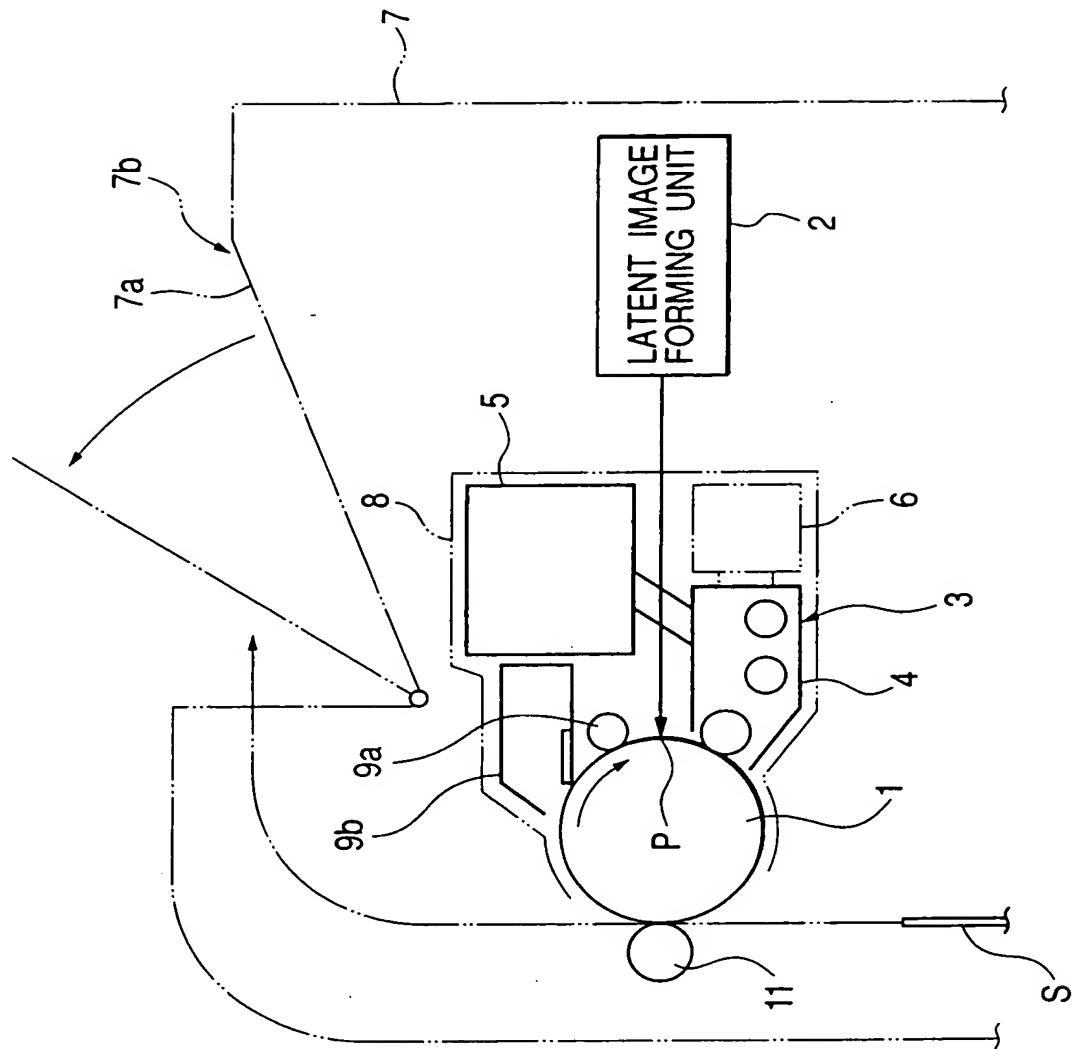


Fig. 8


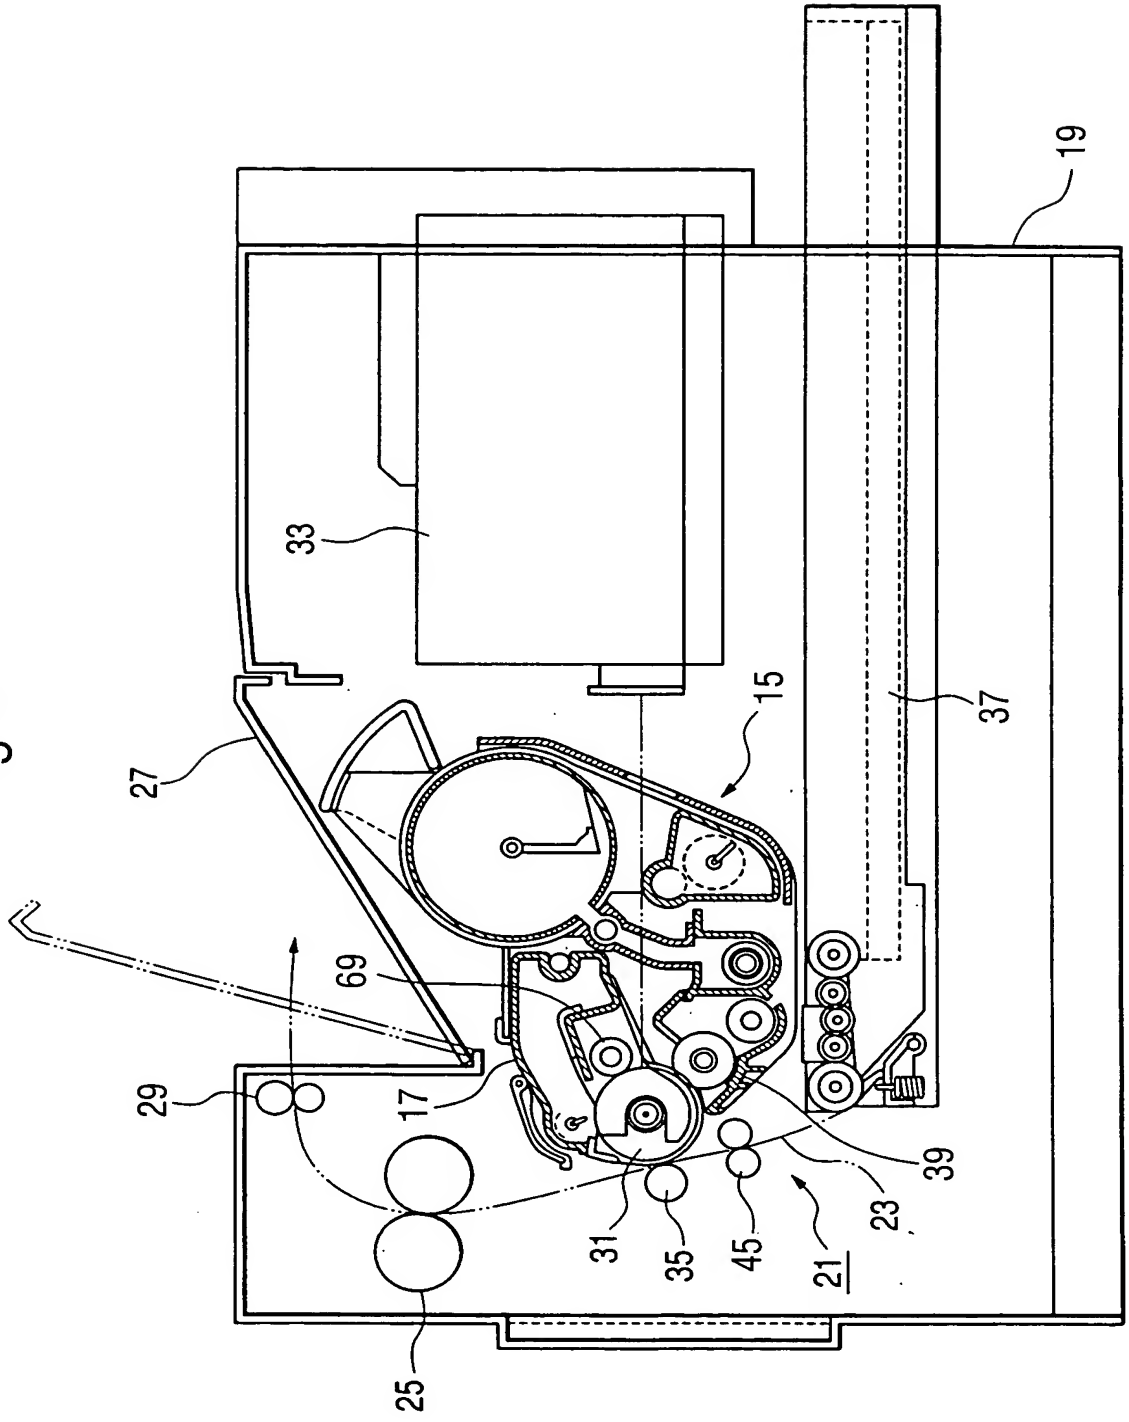


Fig. 9

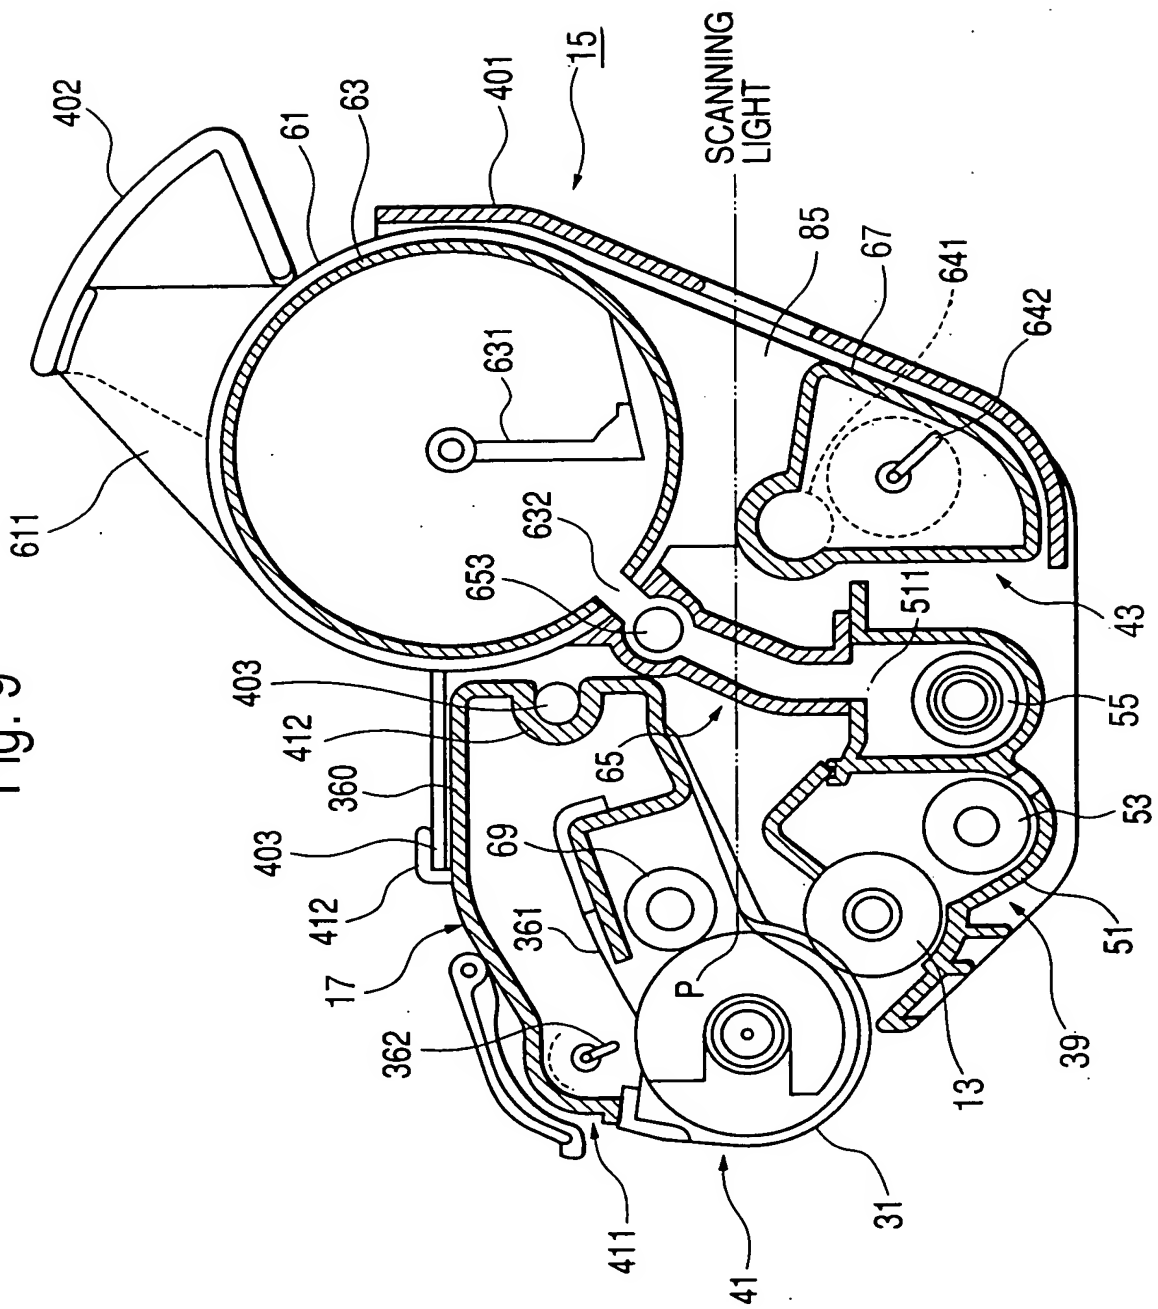

A

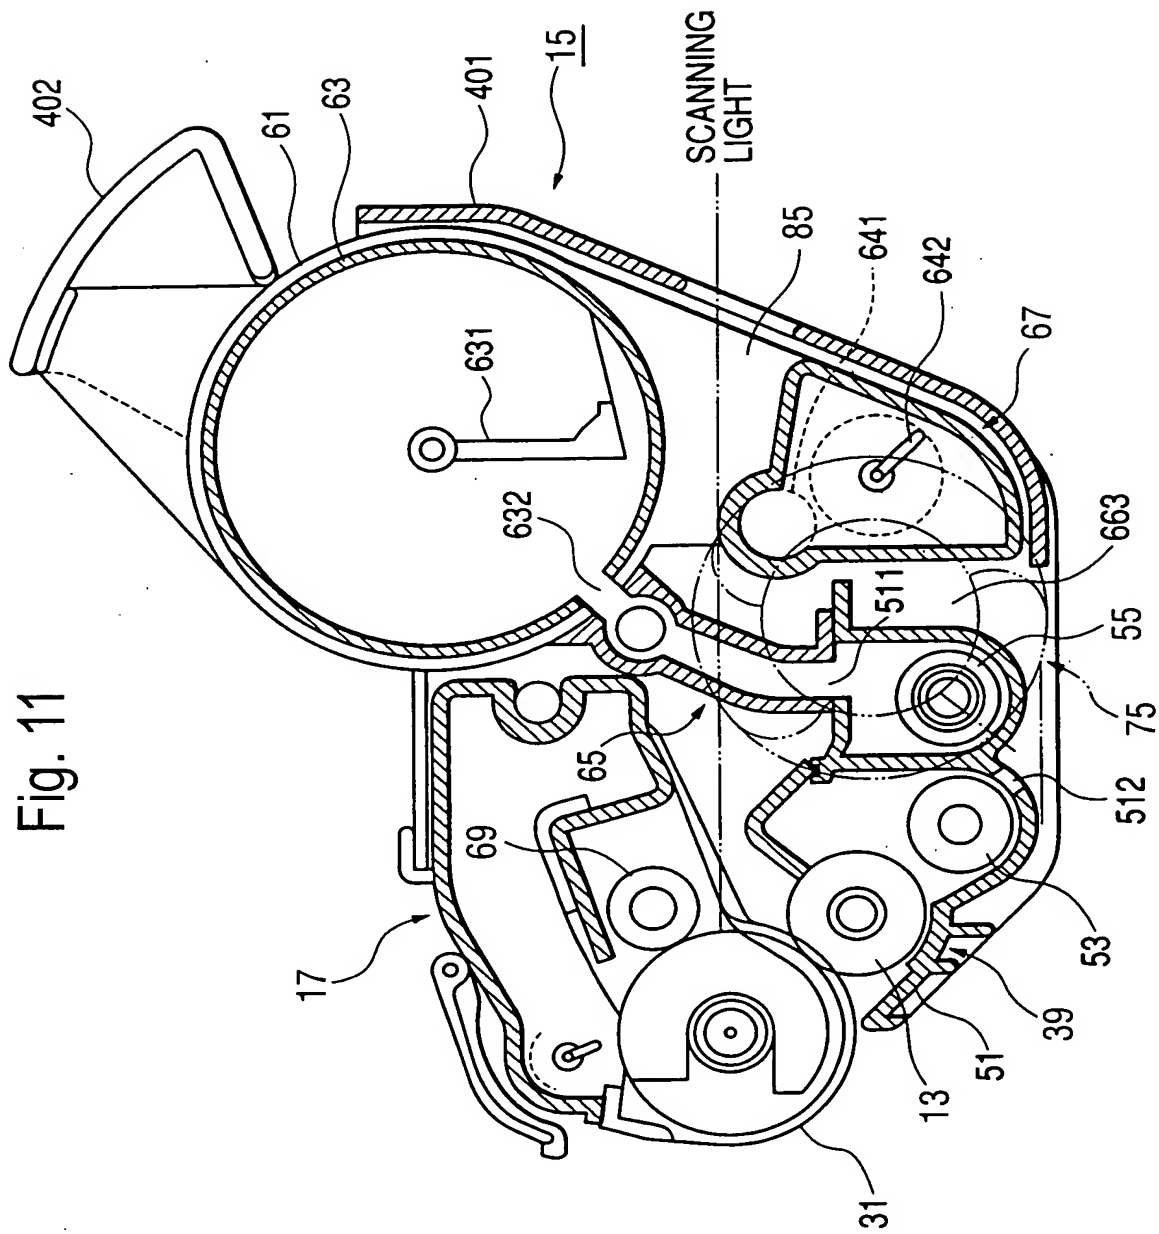


Fig. 12(a)

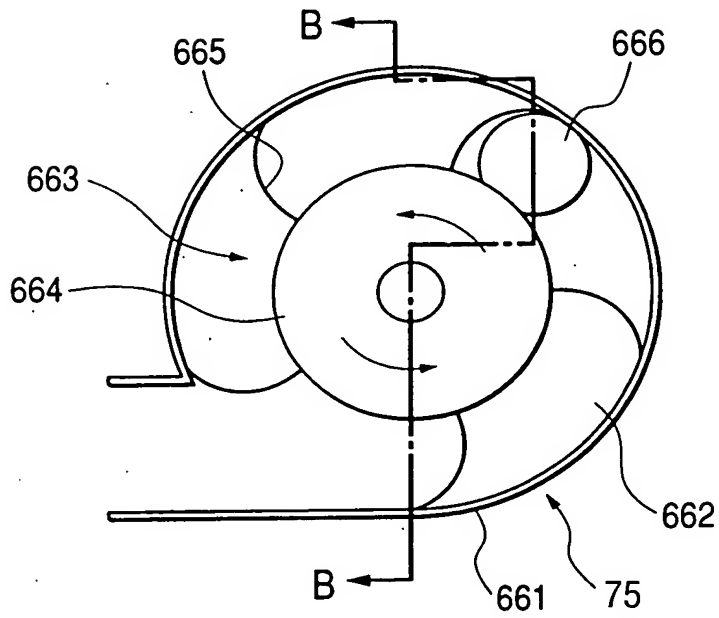


Fig. 12(b)

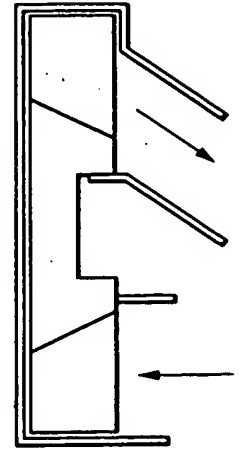


Fig. 13

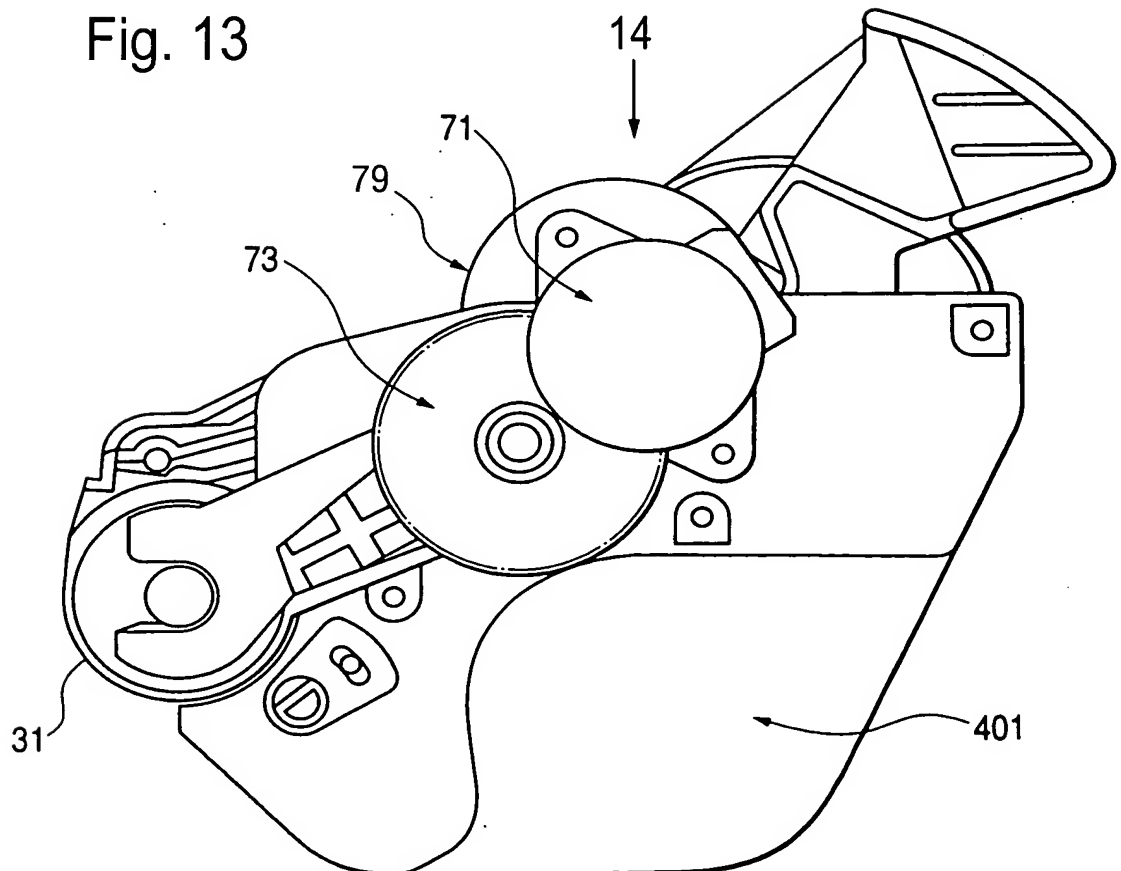


Fig. 14

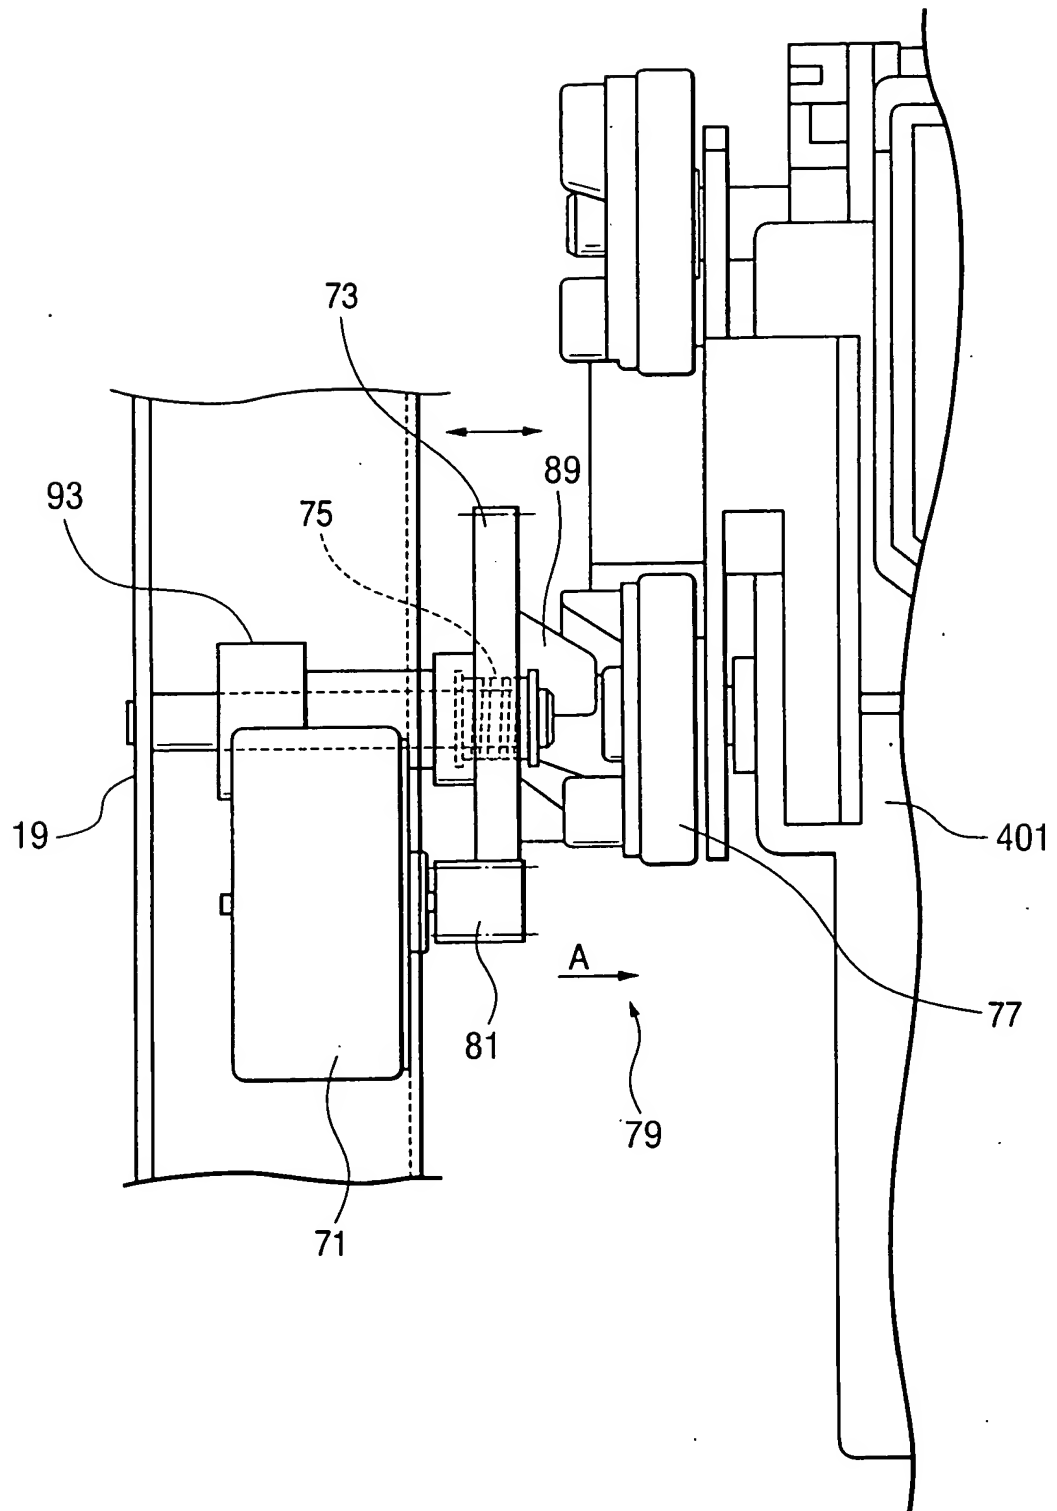


Fig. 15

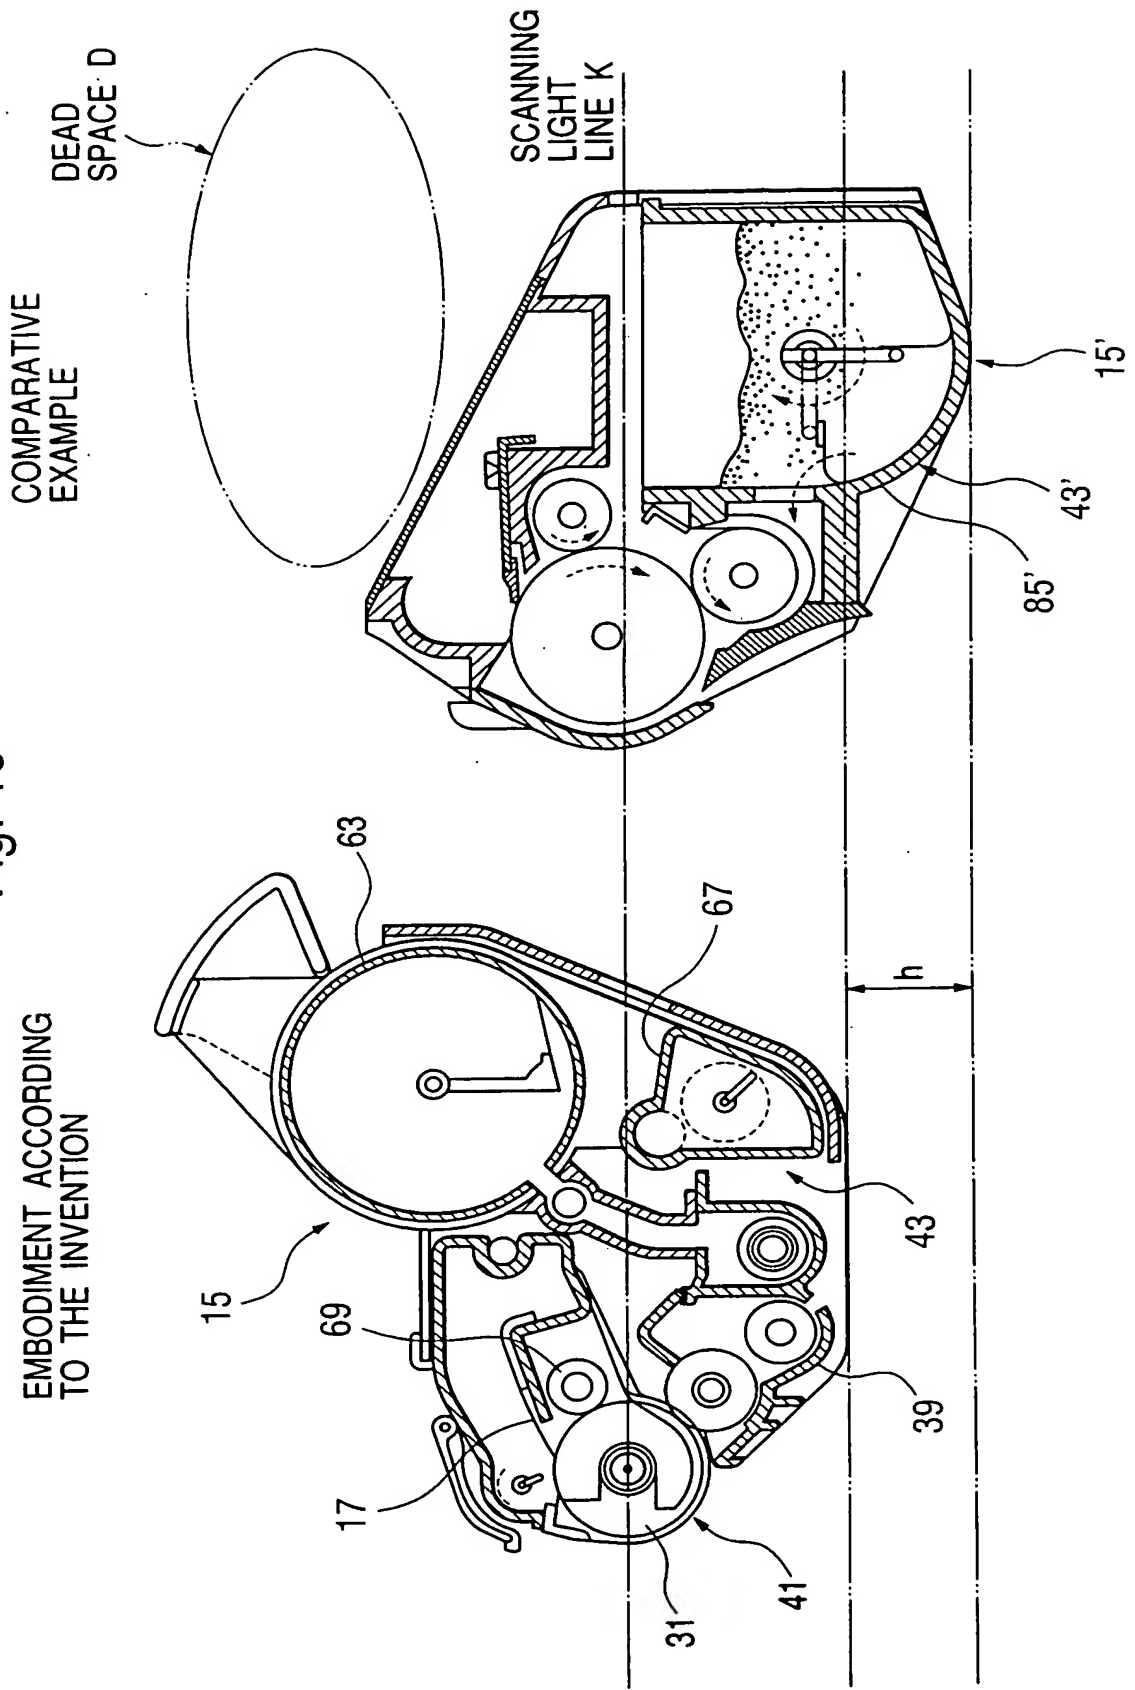


Fig. 16

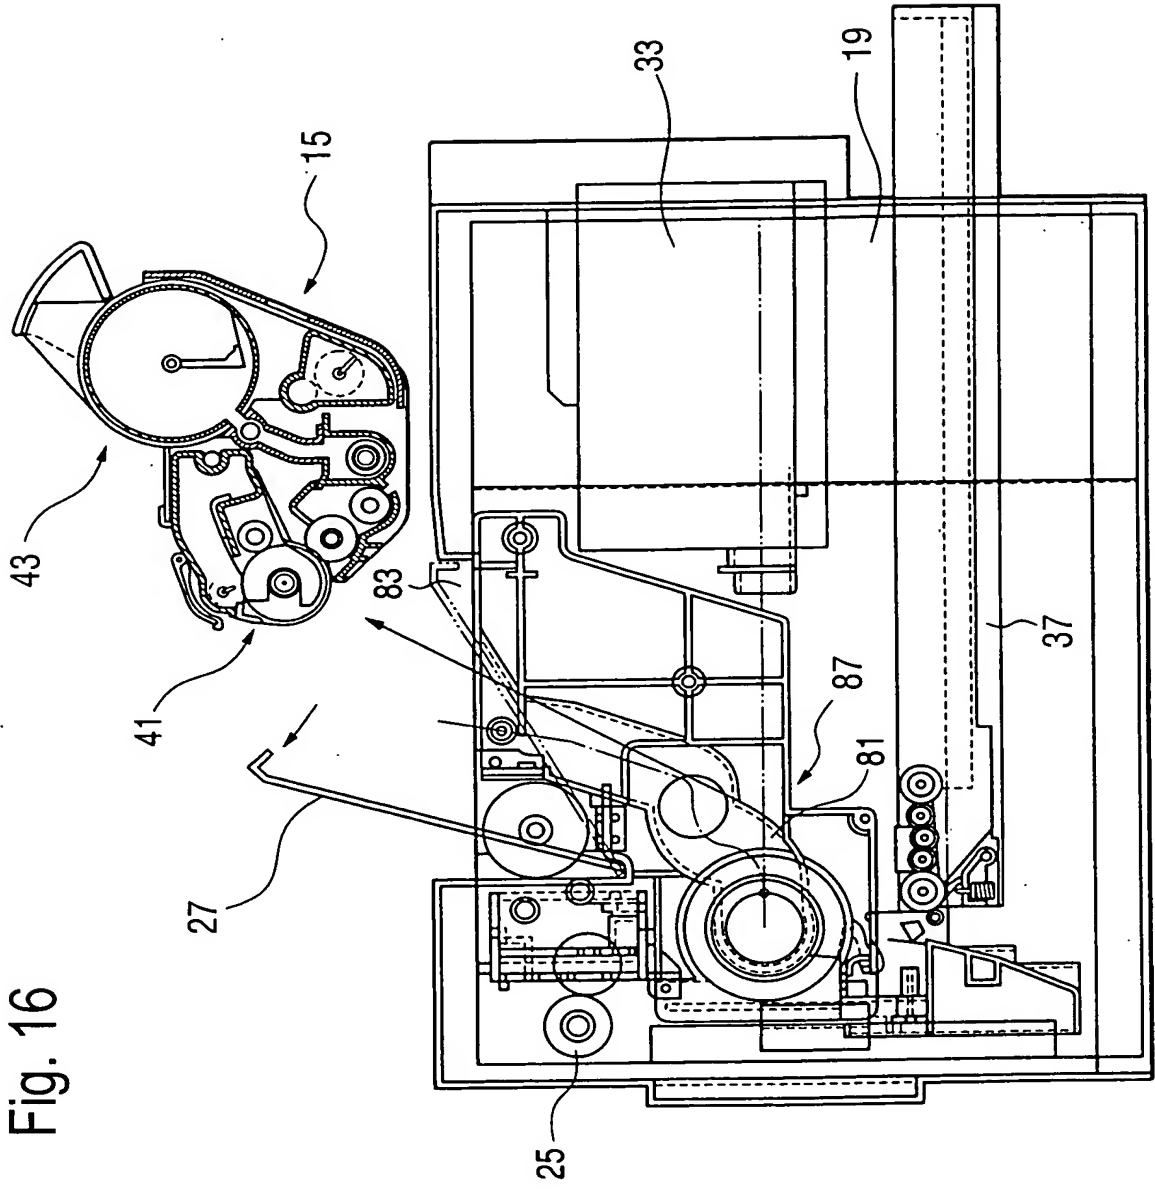


Fig. 17

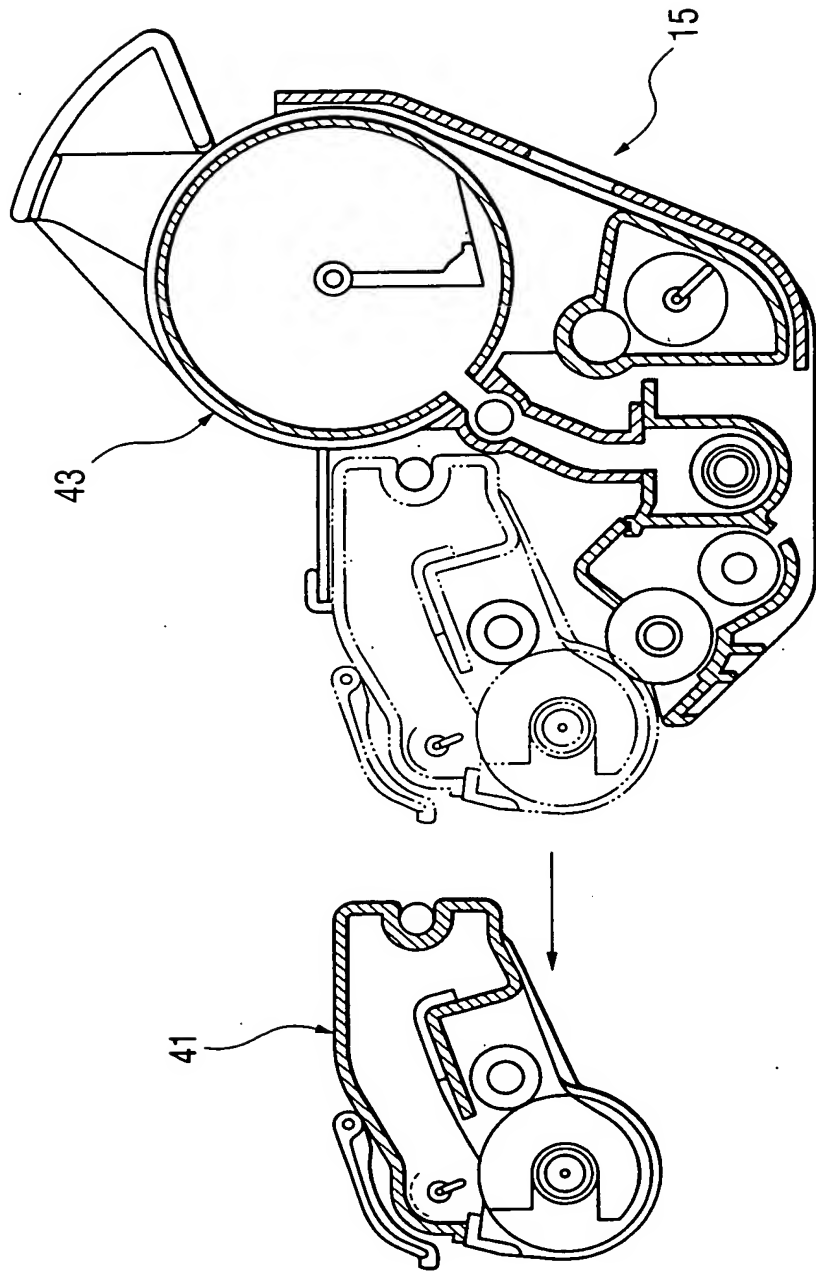


Fig. 18

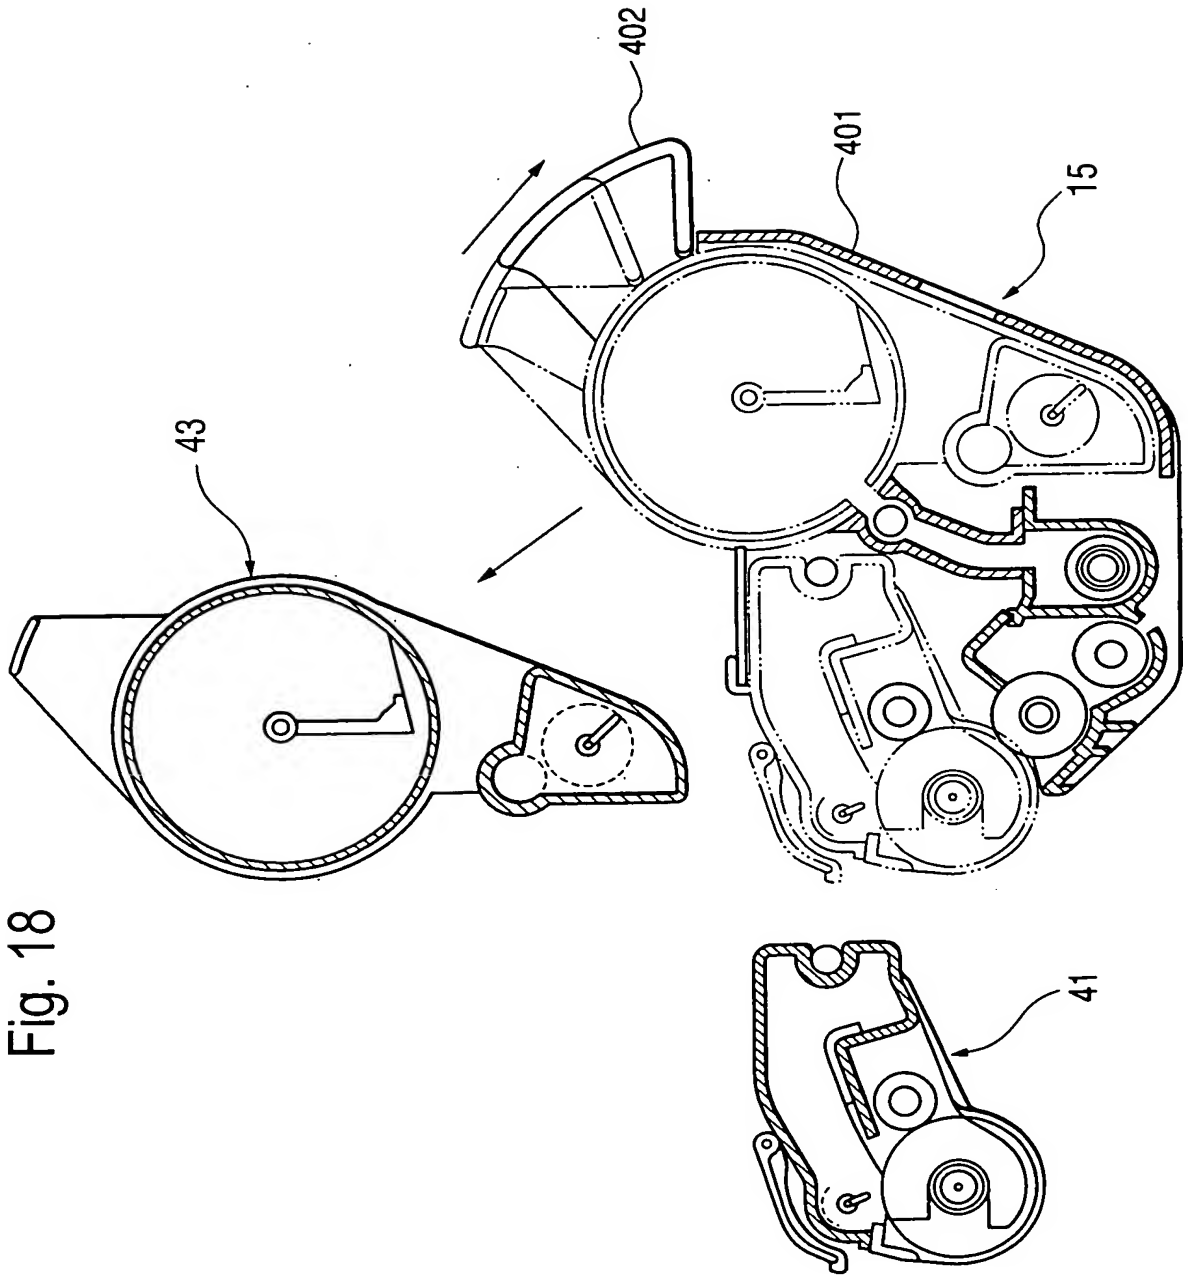


Fig. 19

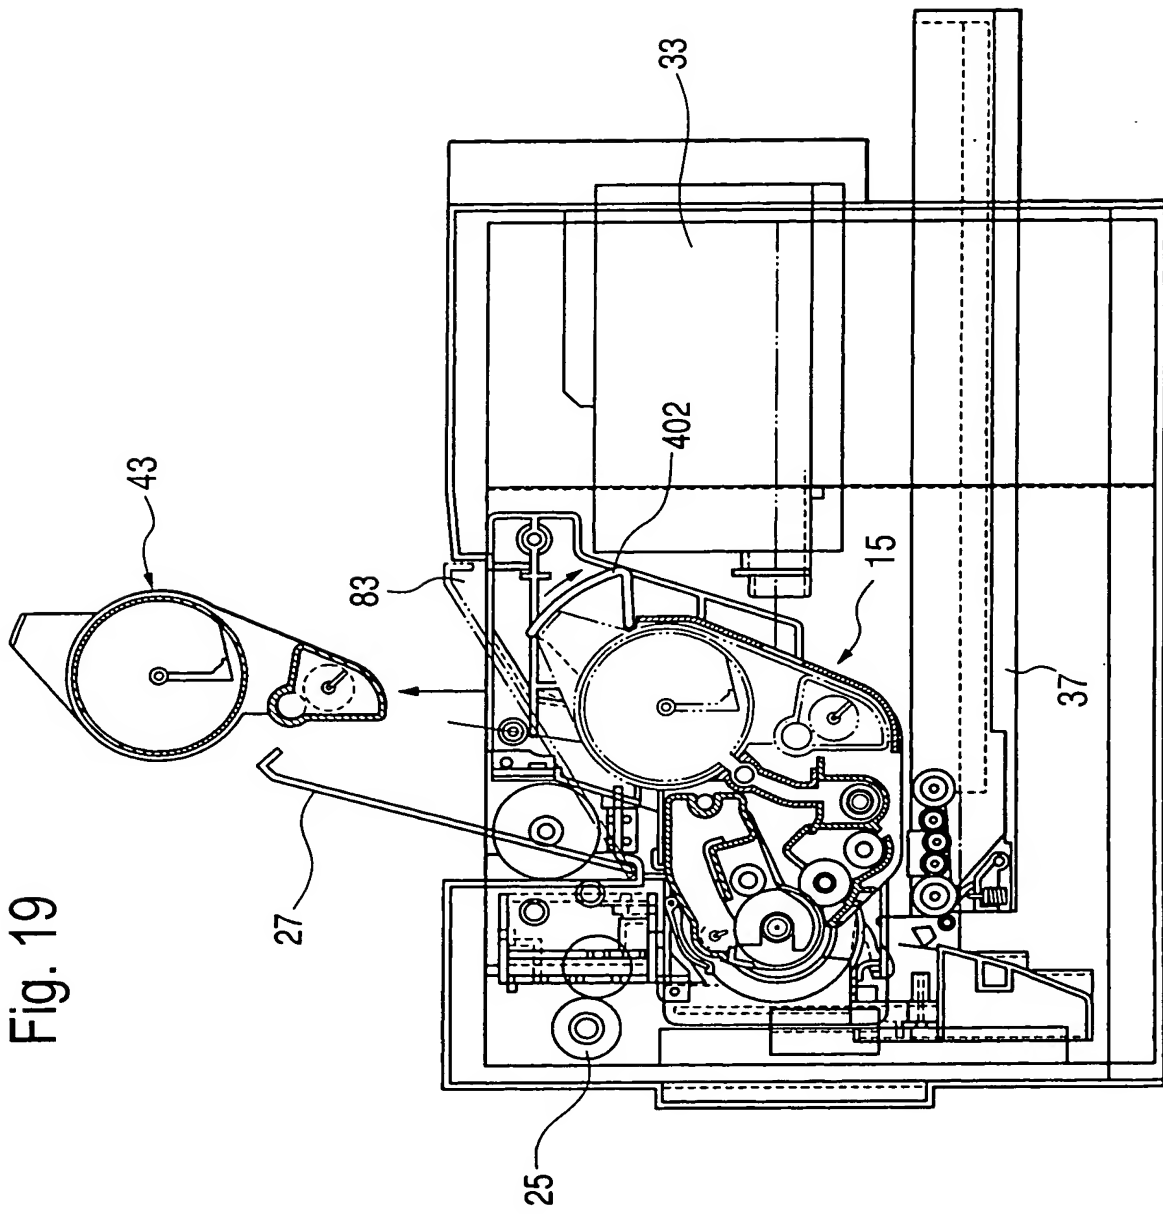


Fig. 20

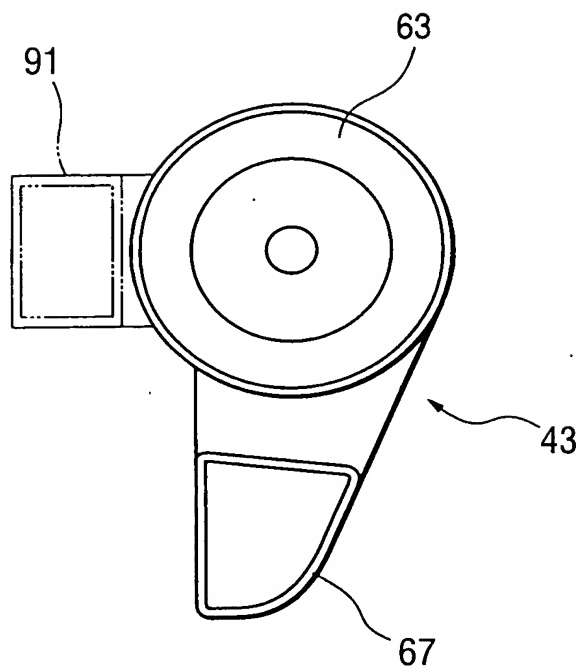


Fig. 21

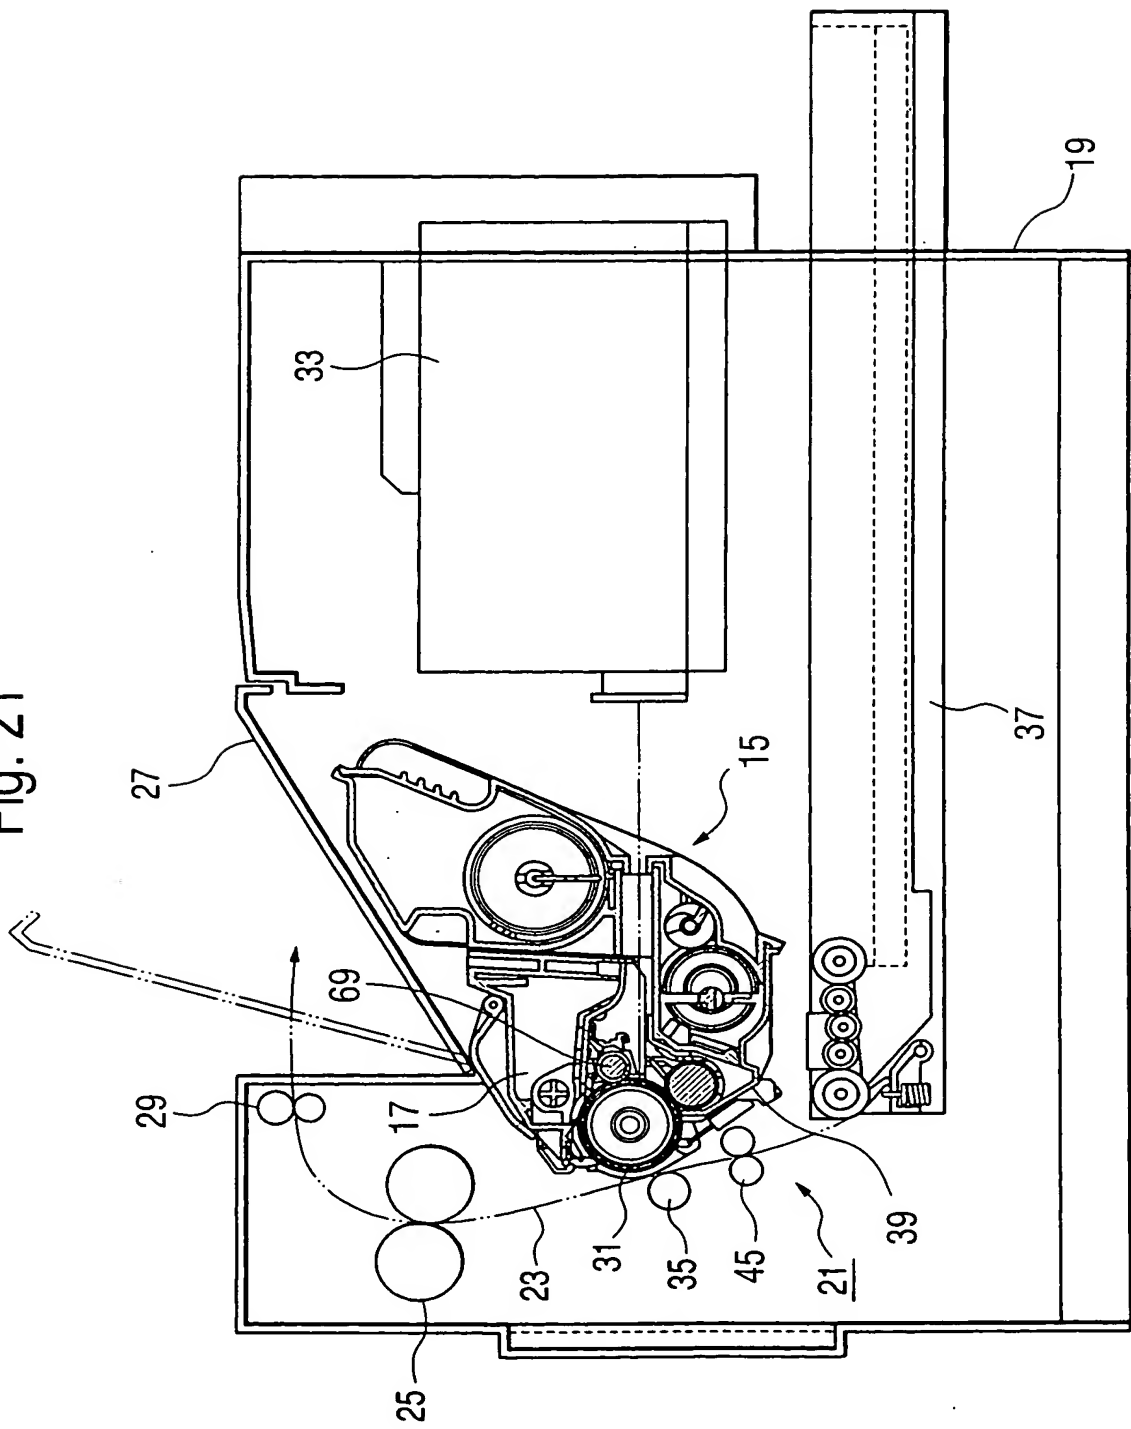
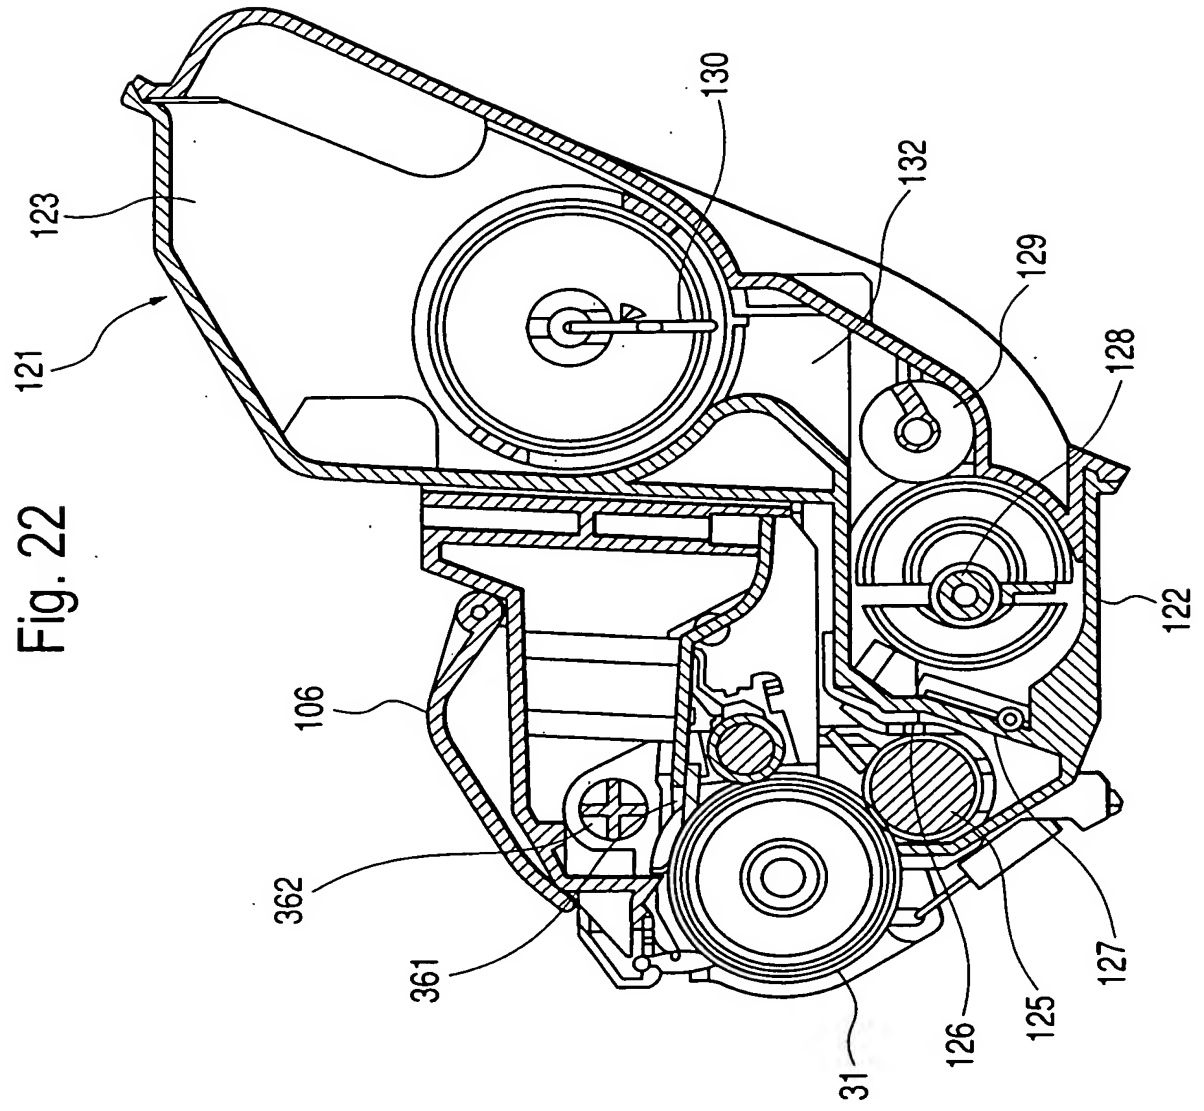


Fig. 22



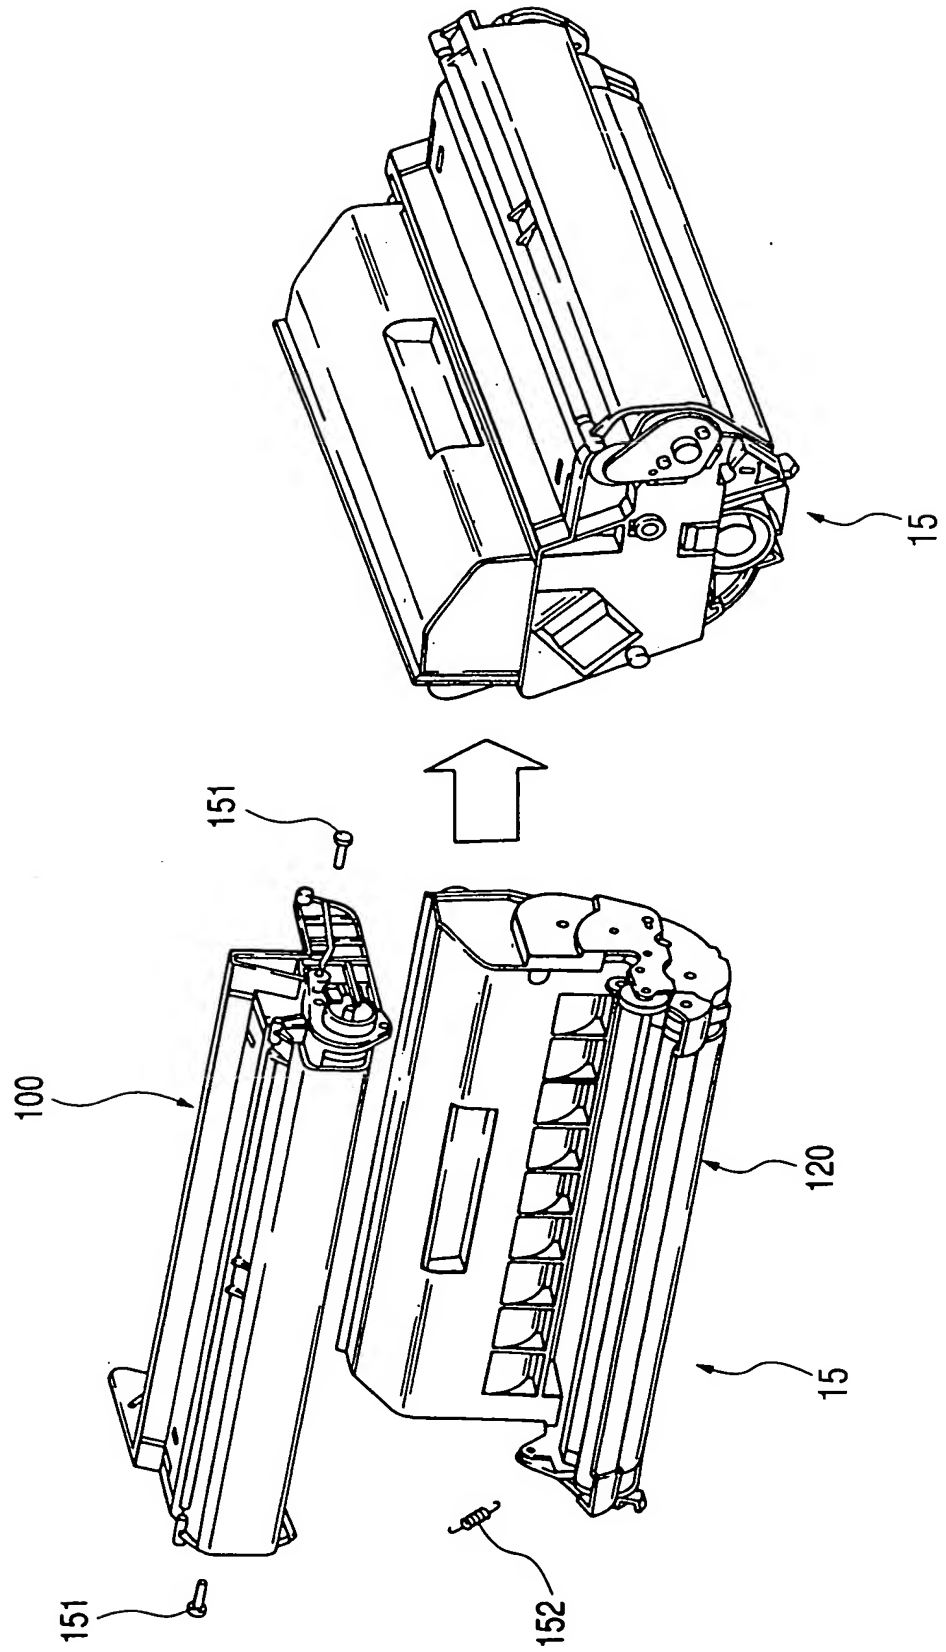


Fig. 24

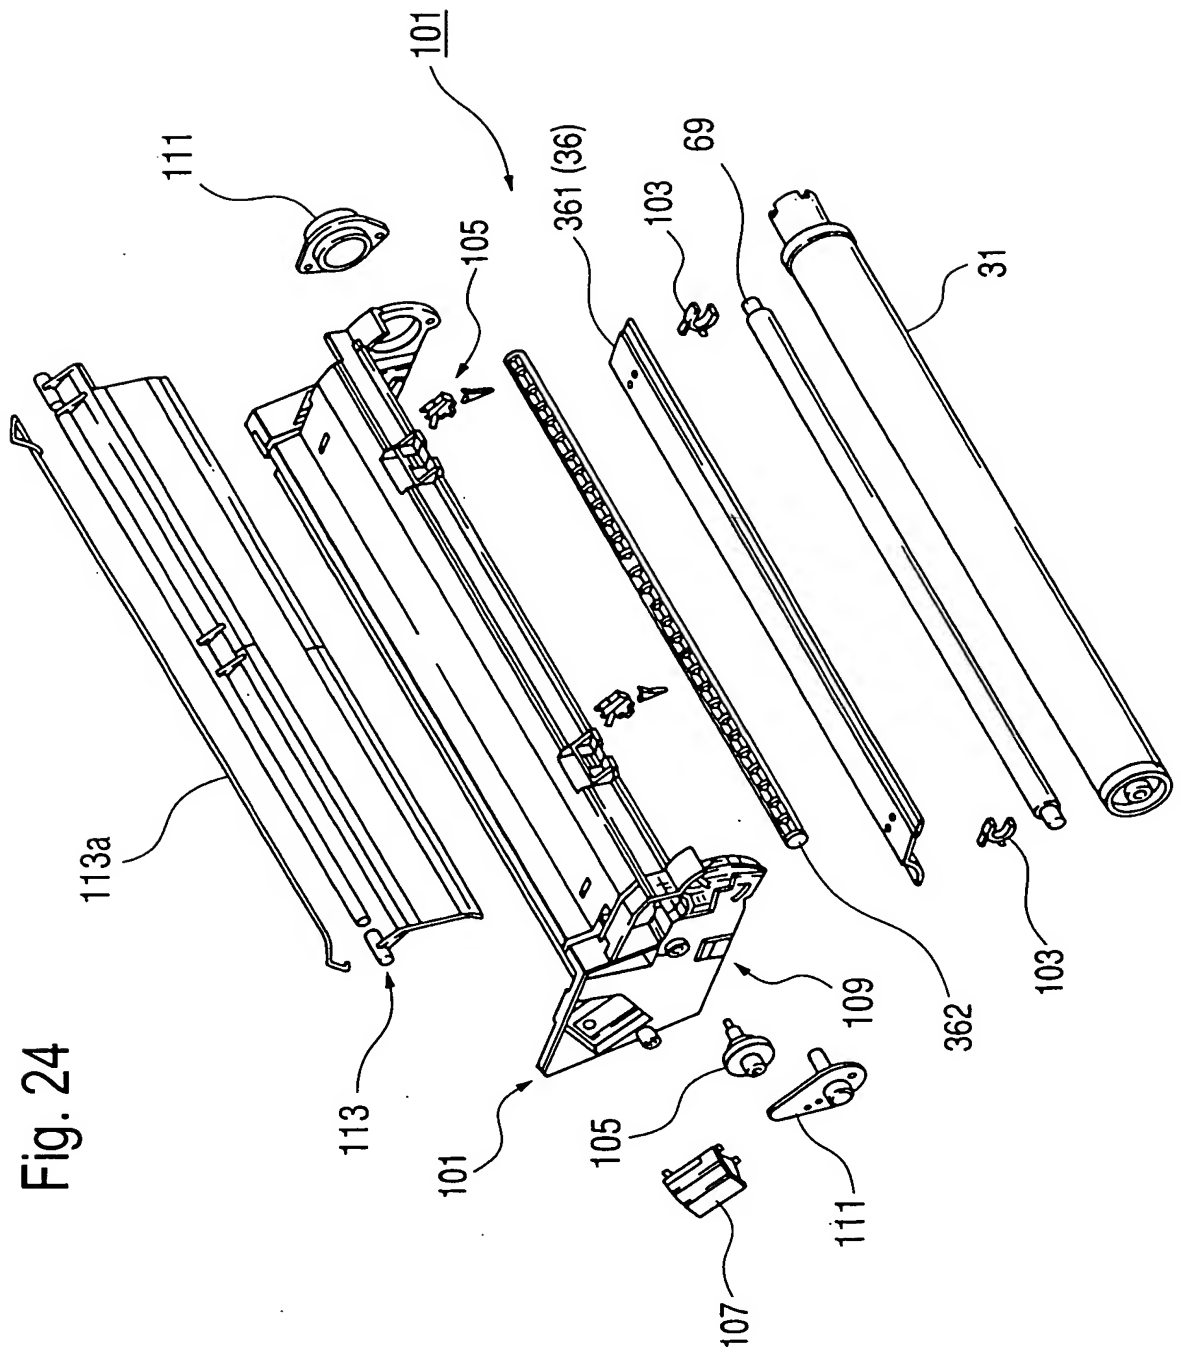


Fig. 25

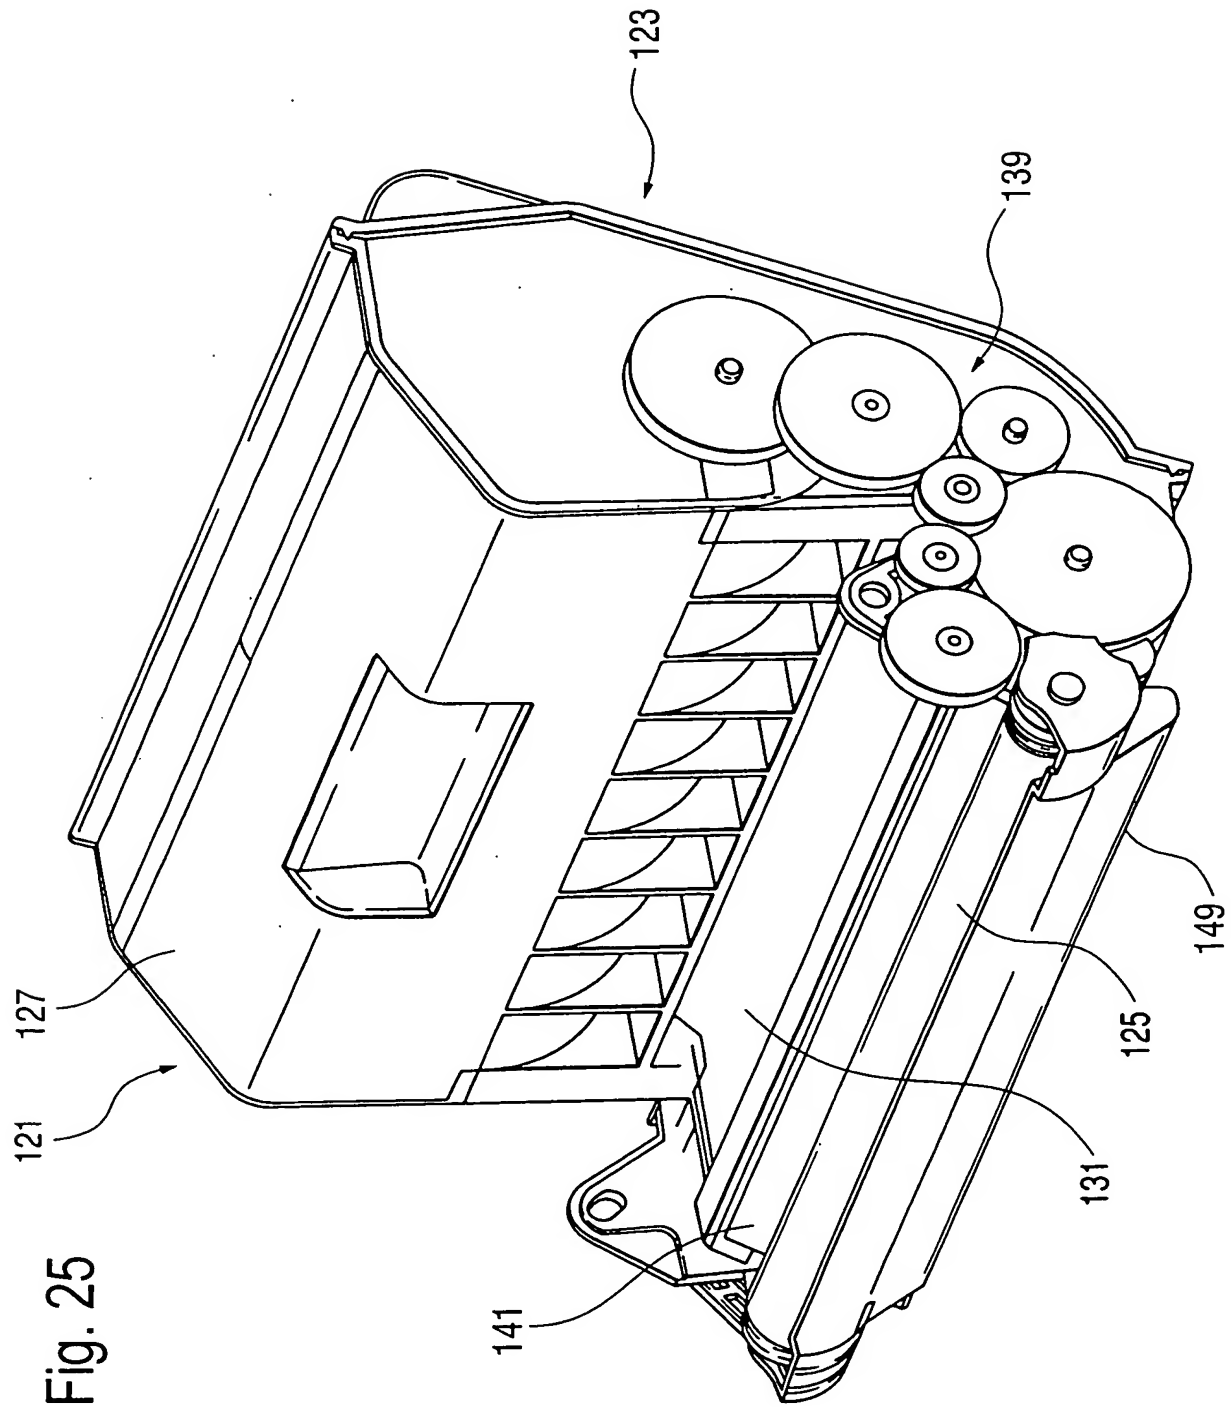


Fig. 26

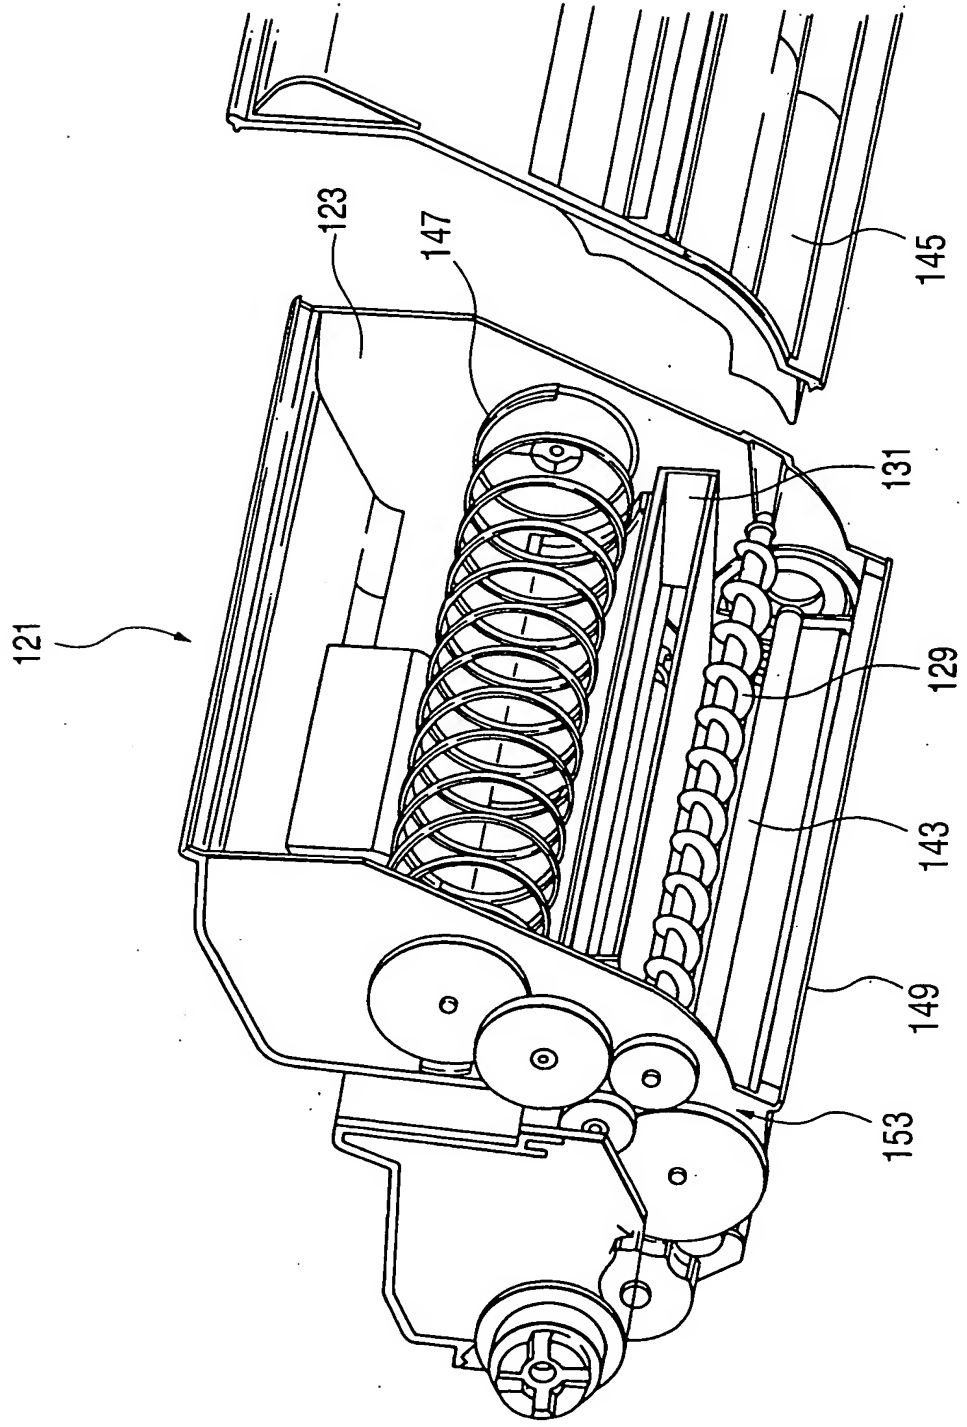


Fig. 27

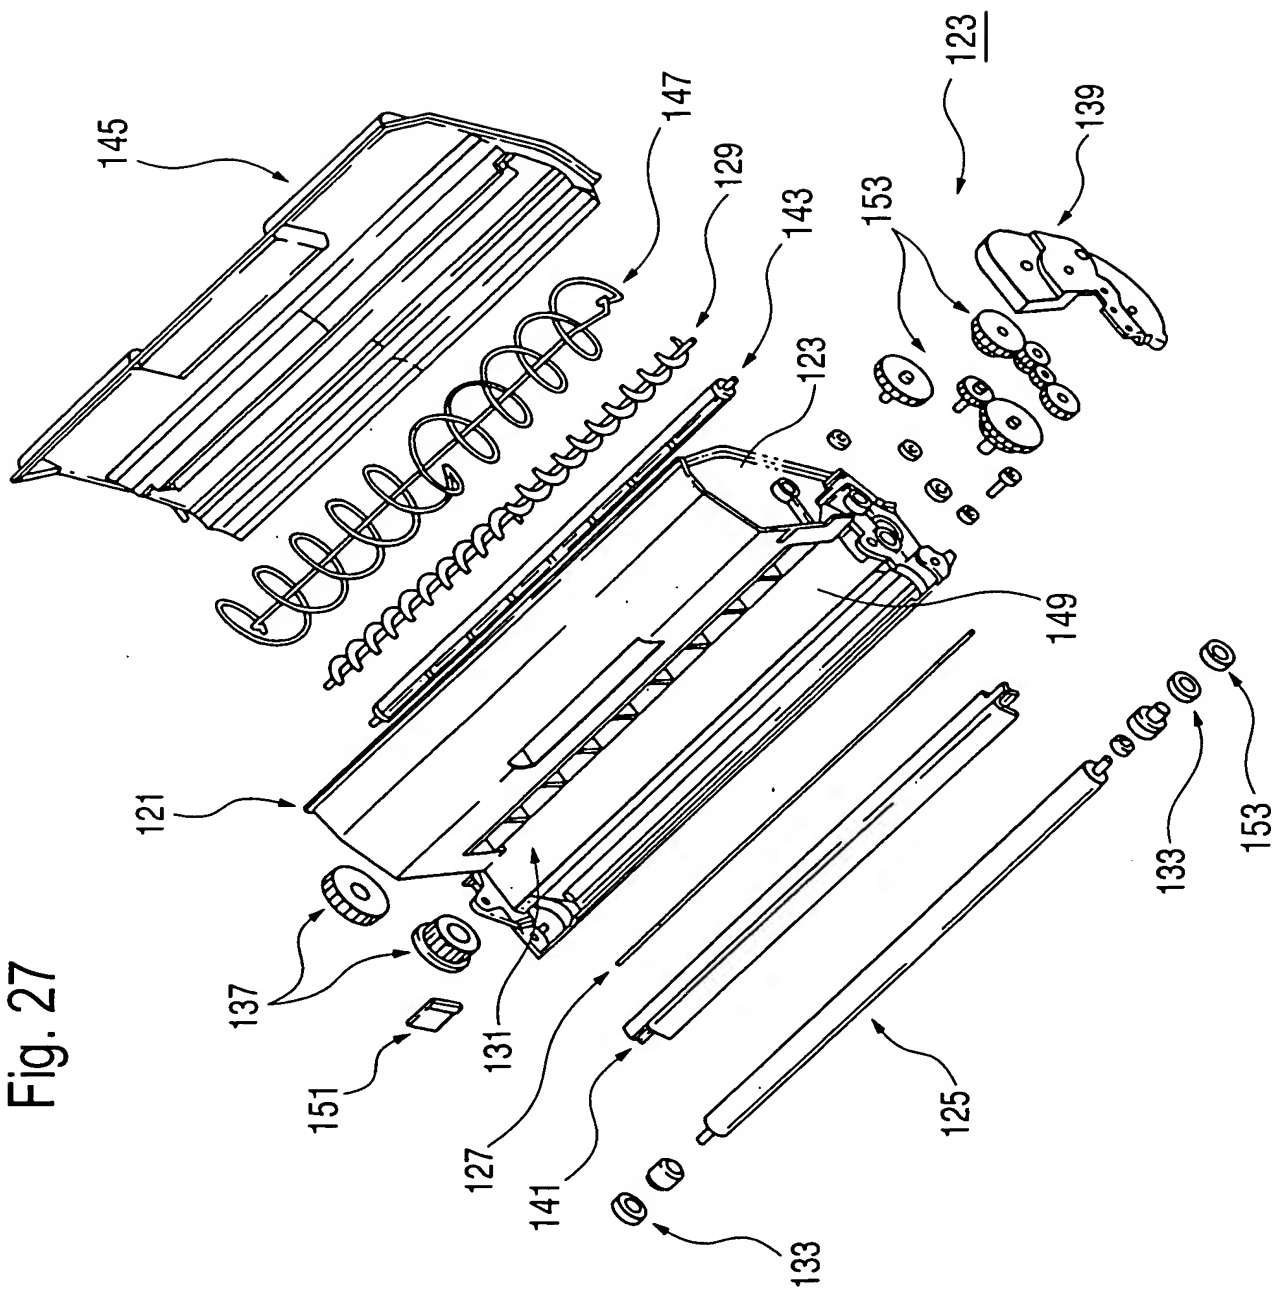


Fig. 28

